


The CB-A2 and CB-B2 connection boxes are required to connect the Kathrein RRU/ARU readers to an Ethernet, power supply and GPIOs. For this purpose, the boxes can be screwed to a flat surface at the four corner points. If the connection box is to be installed on a shelf or mounting system, the mounting kits MK-CB-A2 and MK-CB-B2 can be used. In addition to the brackets and screws, the scope of delivery also includes the T-Slot nuts.

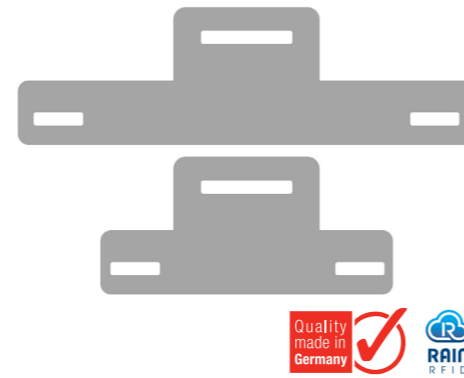


**Features**

- Mounting Kit for Connection Box Advanced A2 (52010662)
- Mounting Kit for Connection Box Basic B2 (52010663)
- For symmetrical mounting on a horizontal pole
- Includes Screws and T-Slot nuts

**Key Applications for connection boxes and mounting kit**

- Logistics
- Industrial Automation
- Vehicle Identification
- Container Tracking
- Healthcare
- Asset Tracking

**Dimensions [mm] (not to scale)**

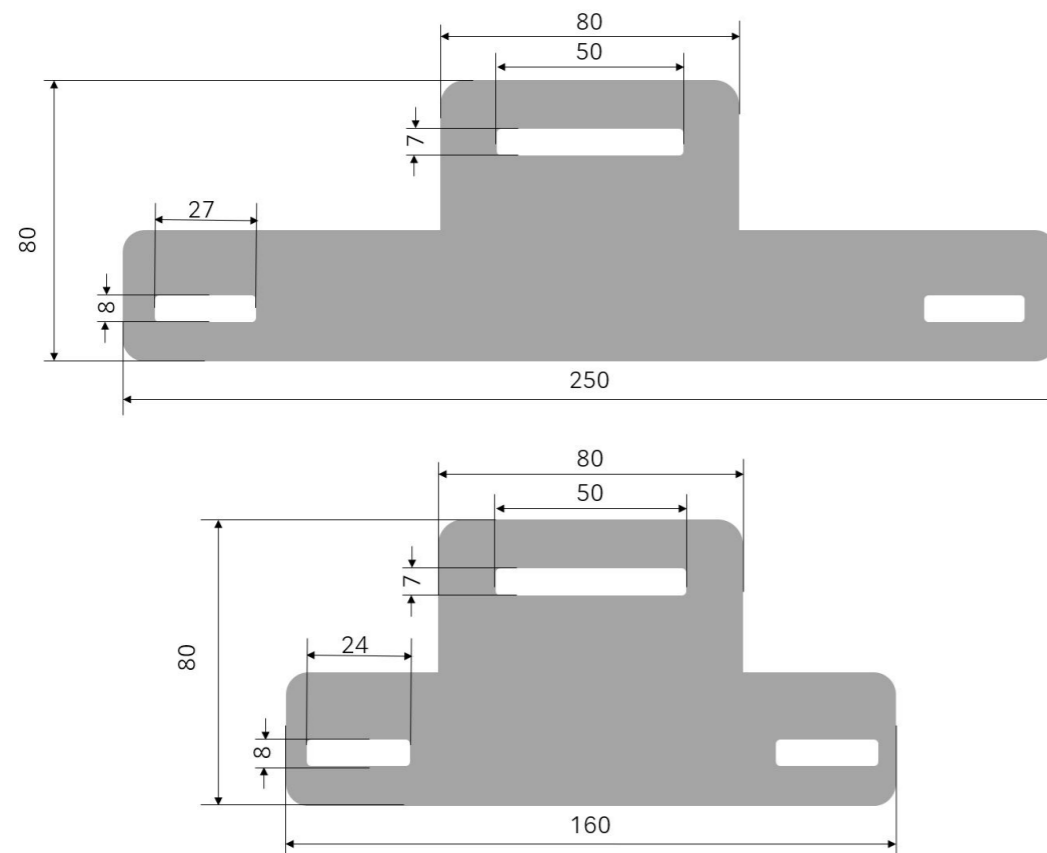

**Scope of Delivery**

MK-CB-A2:

- 2x Mounting Brackets 80 x 250 mm
- 4x M6 x 35 Screws
- 8x T-Slot nuts M6, galvanised
- 4x M6 x 16 Screws

MK-CB-B2:

- 2x Mounting Brackets 80 x 160 mm
- 4x M6 x 35 Screws
- 8x T-Slot nuts M6, galvanised
- 4x M6 x 16 Screws

**Assembly diagram (not to scale)**

