

The Kathrein RRU 4570 reader is the next generation of RAIN RFID readers and the leading IoT device for all professional AutoID solutions. It is the first choice for professional AutoID solutions, such as industrial automation and vehicle identification in ruggedised environments.

Its best-in-class 33-dBm UHF RF unit, embedded 4G mobile interface and the powerful scalable processing unit change the way identification works.

Based on the latest RFID standards, such as EPC Gen2v2/ISO 18000-63, Kathrein RRU 4570 reader supports all market leading transponder chip features for security, authentication and encoding.




Features

- ruggedised high-end RAIN RFID reader
- powerful IoT gateway
- enhanced RF design
- integrated high secure memory module
- 4 antenna ports
- +33 dBm port power
- @KRAI antenna support
- GPIO
- PoE+
- 2G/3G/4G wireless interface
- basic computing module
- embedded dual-core 800 MHz PC
- open source Linux OS
- advanced LED visualisation
- IP67 outdoor use*
- type approval for Europe

Key Applications

- Manufacturing and Automotive
- Logistics
- Track & Trace
- Intelligent Transportation Systems
- Healthcare

Dimensions [mm]

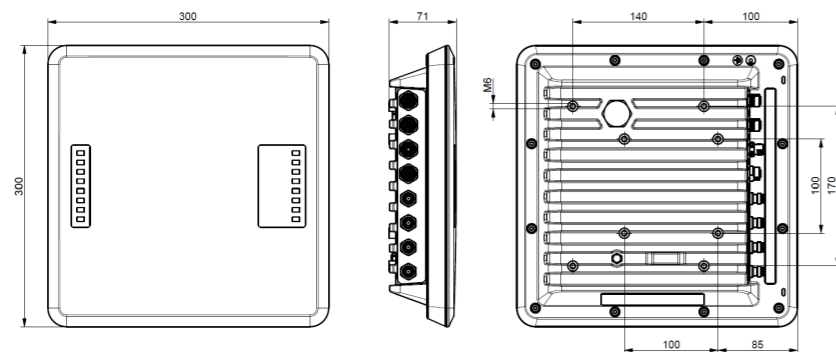

Note

Risk of material damage!

- ▶ Make sure that the depth at which the screws are put into the housing of the reader does not exceed 10 mm (the tightening torque is 5 Nm).

General Specifications

Type	ETSI Version RRU 4570	FCC Version RRU 4570
Order number	52010290	52010298
RFID		
Frequency range	[MHz] 865–868	902–928
Impedance antenna port	[Ohm] 50	
Max. TX power, conducted	[dBm] 33	30 (33 dBm with extended cable length)
Max. TX power, radiated	[dBm ERP] [dBm EIRP] 33	36
RX sensitivity	[dBm] typ. –80	
Number of antenna ports	[R-TNC] 4	
Standards	EN302208-2 V2.1.1, EN301489-3, EN50364, EN62368-1, EN60529, EPC Gen2 V2, UCODE DNA	FCC Part15, UL, IC, EPC Gen2 V2, UCODE DNA
Voltage		
Local supply	[VDC] +10 to +30	
Connector	M12, A-coded, 4-pole	
Remote feed	[VDC] PoE+ according to 802.3at (35–57)	<ul style="list-style-type: none"> ▶ Make sure that the router/switch supports 30 W in the static mode. ▶ Use the cable the length of which does not exceed 100 m. ▶ Make sure to use a Cat 6 cable or a higher level cable. ▶ Note that the internal supply of GPIO-VCC-pin is not possible with PoE+.
Connector	M12, X-coded, 8-pole, port 1 only	
Power consumption		
Local supply	[W] 25.4	
Remote feed	[W] 25.4	
Embedded PC		
Processor	ARMv7-A based processor, 2 cores @ 800 MHz	
Flash memory (eMMC)	[Gbyte] 8	
RAM DDR3	[Gbyte] 1	
Operating system	Linux	
Ethernet		
Number of Ethernet ports	2	
Datarate	[Mbit/s] 10/100	
Connector	M12, X-coded, 8-pole	
©KRAI		
TX Frequency	[kHz] 22	
Supply voltage (output)	[V] 5	
Max. current per port	[mA] 100	
LED visualisation		
Freely programmable	12	
Fixed	1 (power LED)	

> General Specifications

Type	ETSI Version RRU 4570	FCC Version RRU 4570
Order number	52010290	52010298
2G/3G/4G		
Frequency range GSM/GPRS/EDGE	[MHz]	900/1800
Frequency range UMTS/HSPA	[MHz]	800/1800/2100
Frequency range 4G	[MHz]	800/900/1800/2100/2600
Max. TX power (dependent on class and modulation)	[dBm]	33
GPIO		
Max. input voltage	[V]	30
Max. output voltage	[V]	30
Max. current per output port	[mA]	500
Max. current over all outputs	[mA]	1500
Connector		M12, A-coded, 12-pole
RFID controller		
Processor		ARMv7-A based processor with 600 MHz
Flash memory eMMC	[Gbyte]	4
RAM DDR2	[Mbyte]	128
Operating system		Linux
Mechanical properties		
Weight	[kg]	4.00
Degree of protection		IP67*
Operating temperature range	[°C]	-20 to +55
Storage temperature range	[°C]	-40 to +85
Dimensions (L x W x H)	[mm]	300 x 300 x 71


* if all connections are made with a Kathrein cable or have Kathrein protective caps

> Inserting a SIM Card into the RRU 4570 Reader

RRU 4570 reader has a 2G/3G/4G connection option. This chapter describes how to insert a SIM card into the reader.

✓ You have a micro-SIM card available.


1. Open the screw at ①

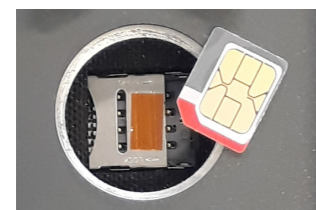

- A SIM card slot is seen:
2. Open the SIM card slot in the direction shown.
 3. Insert the micro-SIM card into the slot.
 4. Lock the slot in the direction shown.
 5. Close the screw to seal the SIM card slot.

> Power Supply

M12, A-coded, 4-pin, male




Pinout Power Supply

Pin	Allocation
1	+24 V DC
2	GND
3	GND
4	+24 V DC

> Ethernet

M12, X-coded, 8-pin, female




Pinout communication PoE+

Pin	Data	PoE
1	TX+	PoE Mode A
2	TX-	PoE Mode A
3	RX+	PoE Mode A
4	RX-	PoE Mode A
5		PoE Mode B
6		PoE Mode B
7		PoE Mode B
8		PoE Mode B

> GPIO

M12, A-coded, 12-pin, female



Pinout general purpose input output

Pin	Allocation	Pin	Allocation
1	OUT_CMN	7	UB
2	OUTPUT_1	8	OUTPUT_4
3	INPUT_3	9	OUTPUT_3
4	INPUT_CMN	10	OUTPUT_2
5	INPUT_1	11	INPUT_2
6	GND	12	INPUT_4