

Windshield Labels and Headlamp Tags







Contents

1	About This Guide	4
2	Explanation of Symbols and Signal Words	4
2.1	Symbols	4
2.2	Signal Words	4
2.3	Other Symbols	4
3	Windshield Labels and Headlamp Tags	5
3.1	Windshield Labels	5
3.2	Headlamp Tags	5
4	Warranty	6
5	Storage	6
6	Mounting the Tag	7
7	Contact Information	O

Copyright © 2019 KATHREIN Solutions GmbH

All rights reserved. No part of this document may be reproduced, distributed, stored in a retrieval system, translated into any language or computer language or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of KATHREIN Solutions GmbH.

KATHREIN Solutions GmbH accepts no liability for omissions or inaccuracies in this document or in relation to the provision or use of the information contained in this document. KATHREIN Solutions GmbH reserves the right to change the products described in this document at any time without notice and does not accept any liability in relation to the application or usage of the products described in this manual. The latest version of this manual is available at our website www.kathrein-solutions.com.

Information provided in this manual is intended to be accurate and reliable. However, KATHREIN Solutions GmbH assumes no responsibility for its use; nor for any infringements of rights of third parties which may result from its use.

This document and the information contained in it are proprietary information of KATHREIN Solutions GmbH and must be treated as confidential. KATHREIN Solutions GmbH provides this document to its customers in connection with contacts of sale for the products described therein. If the person in possession of this document, being a legal or natural person, is not a contractual sales partner of KATHREIN Solutions GmbH, or KATHREIN Solutions GmbH has not intended him by other means as the recipient of the document and the information contained therein, the person in possession is hereby informed that the use of this document is unlawful and a violation of the rights of KATHREIN Solutions GmbH.

2 of 10 3 of 10

1 About This Guide

This document gives information on how you can use the windshield labels and headlamp tags.

The target group of this manual is specialist personal who put the tags into operation.

This document is valid for all Kathrein and OEM-specific passive UHF RFID windschield labels and headlamp tags.

Tip

This document applies to all Kathrein and OEM-specific passive UHF RFID windschield labels and headlamp tags. Even if it is referred to in the text as tags, it applies to both the windshield labels and headlamp tags.



Keep these instructions for further reference, and if the device passes to another owner, pass them on to the new owner.

- ► For more information, visit our website www.kathrein-solutions.com.
 - ☐ The datasheets are available for download at the internet product page.

2 Explanation of Symbols and Signal Words

2.1 Symbols



Risk of material damage or malfunction

2.2 Signal Words

This signal word indicates useful tips and recommendations.	
---	--

2.3 Other Symbols

Symbol	Meaning
\boxtimes	operating instruction
1, 2, 3n	operating instructions in a fixed order
	result of an operating instruction
\boxtimes	condition for the execution of an operating instruction
•	list/list entry
www.kathrein- solutions.com	hyperlinks

3 Windshield Labels and Headlamp Tags

The passive UHF RFID windshield labels and headlamp tags serve for the automatic, contactless identification of vehicles (Automatic Vehicle Identification, AVI).

The UCODE DNA authentification uses an AES co-processor and a 128-bit AES group crypto key. The privacy protection is realised via an untreaceable command and a 128-bit AES group crypto key.

Key Applications:

- Automated Vehicle Identification (AVI)
- Electronic Toll Collection (ETC)
- Electronic Vehicle Identification (EVI)
- Electronic Vehicle Registration (EVR)
- Intelligent Parking Interface (IPI)
- Intelligent Transportation Systems (ITS)
- Smart City Applications

3.1 Windshield Labels

The windshield label is adhered to the inside of the windshield. The development of the RFID windshield label has been focused on a very high read range doe to the special antenna behind the glass and a passive funtion without a battery.

There are two types of windshield labels, monolabel and Z-folded, the latter consisting of two layers. The label material is a combination of a PP and PET layer. Special cuts and other features can improve security against removal and re-use.

The protection class of the windshield label is IP65.

3.2 Headlamp Tags

The headlamp tag is adhered to the outside of the headlamp. The development of the RFID headlamp tag has been focused on a very high read range due to the special antenna on the headlamp and a passive function without a battery.

There are two types of windshield labels, monolabel and Z-folded, the latter consisting of two layers. The label material is a combination of a PP and PET layer. Special cuts and other features can improve security against removal and re-use.

The protection class of the headlamp tag is IP65.

4 of 10 5 of 10

4 Warranty



A warranty is only provided if the storage and mounting conditions, steps and requirements described in Chapter 5 *Storage*, *p. 6* and in Chapter 6 *Mounting the Tag*, *p. 7* have been met and carried out as described.

The compliance with the above must be documented and proven.

For the warranty to be guaranteed, it is necessary to put the tags into operation no later than after 12 months of storage since the date of delivery.



NOTICE

Risk of malfunction!

If the tags are not stored at the recommended storage temperature, the tag characteristics might be impared.

- ▶ Make sure to store the tags at the recommended storage temperature.
- ► The warranty is guaranteed only if the tags are stored at the recommended storage temperature of +25 ±5 °C at 50 ±10% relative non-condensing humidity.

5 Storage

► Make sure to store the tags in the temperature range –25 to +50°C and relative non-condensing humidity of 20–90 %. The recommended Kathrein sotrage temperature is +25 ±5 °C at 50 ±10% relative non-condensing humidity.



NOTICE

Risk of malfunction!

If the tags are not stored at the recommended storage temperature, the tag characteristics might be impared.

- ▶ Make sure to store the tags at the recommended storage temperature.
- ► The warranty is guaranteed only if the tags are stored at the recommended storage temperature of +25 ±5 °C at 50 ±10% relative non-condensing humidity.

6 Mounting the Tag

Kathrein passive and OEM-specific UHF RFID tags are optimised to get a maximum read performance on a glass surface.

To mount the tag:

- 1. Make sure that the windscreen and headlamp surface is clean, dry and oil-free.
- 2. Make sure to put the tags into operation at a temperature over +10° C. The recommended temperature is 25° C.
- 3. For z-folded tags:
 - Make sure not to touch the rear side of the windscreen or headlamp-facing layer.
 - Put the driver-facing layer onto the rear side of the windscreen or headlamp-facing layer.
 - Peel off the tag from the liner.
 - Make sure not to touch the glued surface.
- 4. For all other tags:
 - Peel off the tag from the liner.
 - Make sure not to touch the glued surface.
- 5. Make sure to put the tag such that there is a distance of min. 3 cm around the tag on each side from the car body UV protection, heating system or any other kind of foil.
- 6. Put the tag onto the oil-free surface and press hard from the middle of the towards the outer edges to remove the air bubbles. When applying the tags onto the surface, make sure to only use objects without sharp edges not to damage the tag.
- 7. Press down with your finger and stroke from the centre of the transponder to the corners and outwards. Make sure, that you press the transponder quite hard to the surface. The adhessive gets activahigh pressure.
- 8. Allow to harden for 24 hours for optimal security protection.




The warranty is only provided if all the above mentioned steps have been carried out and the requirements have been met.


6 of 10 7 of 10

Use the following areas to mount the tags:

Cars with standard glass windshields

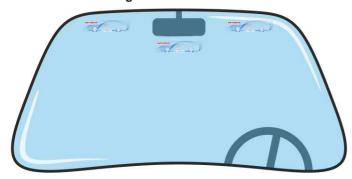

Cars with heated windshields

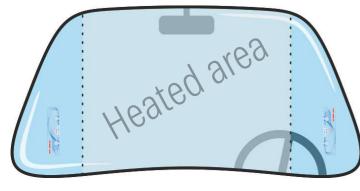

► See the vehicle manual to find the zones without the heating system.

Cars with UV-protected windshields



► See the vehicle manual to find the zones without UV protection.

Headlamps



► Position the headlamp tag horizontally, in the lower part, on the headlamp, see the picture on the left.

7 Contact Information

KATHREIN Solutions GmbH Kronstaudener Weg 1 83071 Stephanskirchen Phone +49 (0) 8036 / 90 831 20

Fax +49 (0) 8036 / 90 831 69 Email: info@kathrein-solutions.com

8 of 10 9 of 10

